





# Axial Drilling And Milling Heads



FOR DIN 5482 MACHINE USING

DIN 5482

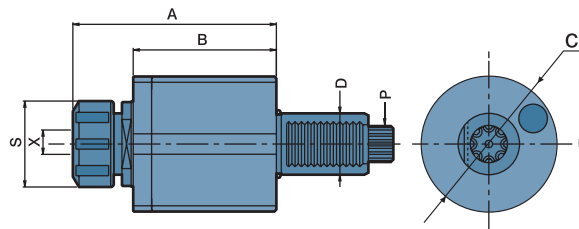

**Power Transmission According To DIN 5482**

- External coolant supply
- To be used for collet DIN 6499
- Collet is not included

## DIMENSIONS

ORDER NO.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	P DIN 5482	CODE NO.
DA30548225	30	1-16 ER25	42	6000	1 : 1	101	70	68	B15X12	5006-066
DA40548232	40	2-20 ER32	50	6000	1 : 1	110	73.5	86	B17X14	5006-067
DA50548240	50	3-26 ER40	63	6000	1 : 1	120	81.5	96	B20X17	5006-068
DA60548250	60	10-34 ER50	78	6000	1 : 1	140	88.5	116	B25X22	5006-069

## Axial Tapping Heads

DIN 5482

## DIMENSIONS

ORDER NO.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	P DIN 5482	CODE NO.
TDA30548216	30	1-10 ER16	30	3000	1 : 1	108	71.5	68	B15X12	5006-070
TDA40548220	40	1-13 ER20	35	3000	1 : 1	95.5	55	86	B17X14	5006-071
TDA50548225	50	1-16 ER25	42	3000	1 : 1	123	81.5	96	B20X17	5006-072
TDA60548232	60	2-20 ER32	50	3000	1 : 1	158.5	88.5	116	B25X22	5006-073