




# Radial Drilling And Milling Heads




## BACKWARDS

## DIN 5482

MODE: BL  
LEFT-HAND

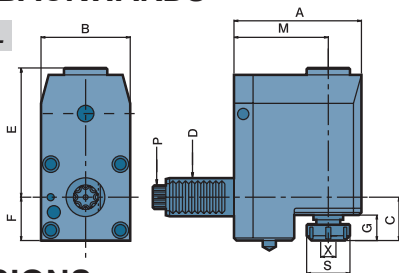

MODE: BR  
RIGHT-HAND

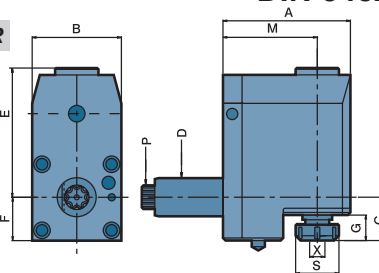

- To be used for collet DIN 6499
- Collet is not included
- External coolant supply

## DIMENSIONS

ORDER NO.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	E	F	G	M	P DIN 5482	CODE NO.
BR3054822572 BL3054822572	30	1-16 ER25	42	5000	1 : 1	95	60	42	75.5	31.5	28.5	72	B15X12	5006-079A
BR4054823290 BL4054823290	40	2-20 ER32	50	5000	1 : 1	124	80	44	110	42	34	90	B17X14	5006-080
BR5054824090 BL5054824090	50	3-26 ER40	63	5000	1 : 1	129	86	49	112	45	39	90	B20X17	5006-081
BR60548250106 BL60548250106	60	10-34 ER50	78	5000	1 : 1	147	104	83	118	54	42	106	B25X22	5006-082A

# Radial Tapping Heads-Backwards

## DIMENSIONS

ORDER NO.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	E	F	G	M	P DIN 5482	CODE NO.
TBR3054821672 TBL3054821672	30	1-10 ER16	30	3000	1 : 1	95	60	44	75.5	31.5	32	69	B15X12	5006-083A
TBR4054822090 TBL4054822090	40	1-13 ER20	35	3000	1 : 1	24	80	50	110	42	34	90	B17X14	5006-084
TBR5054822590 TBL5054822590	50	2-16 ER25	42	3000	1 : 1	129	86	54	112	45	36	90	B20X17	5006-085
TBR60548232106 TBL60548232106	60	2-20 ER32	50	3000	1 : 1	147	104	87	118	54	40	106	B25X22	5006-086A

