




ER Spring Collet Chuck System



Collet Holders With Morse Taper Shank

DIN 6499 DIN 228
MT-SHANK

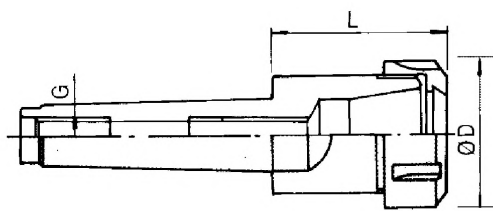

ORDER NO.	TAPER	COLLET TYPE	L	D	G	WEIGHT KGS	CODE NO.
V-401	MT2	ER16	40	28	3/8"-16W or M10X1.5P	0.2	3023-301
V-402		ER20	43	34		0.3	3023-302
V-403		ER25	47	42		0.4	3023-303
V-404	MT3	ER16	40	28	3/8"-16W or 1/2"-12W M10X1.5P, M12X1.75P USA 1/2"-UNC13	0.3	3024-301
V-405		ER32	70	50		0.8	3024-302
V-406		ER40	80	63		1.1	3024-303
NEW V-451		ER20	43	34	1/2"-12NC or M12X1.75P	0.3	3024-304
V-452		ER25	47	42		0.5	3024-305
V-407	MT4	ER32	60	50	5/8"-11W or M16X2.0P	1	3025-301
V-408		ER40	82	63		1.4	3025-302
V-409		ER50	85	78		2.2	3025-303
V-410	MT5	ER40	82	63	1"-8W or M24X3.0P	2.1	3026-301
V-411		ER50	85	78		2.9	3026-302



Collet Chuck Kit With Morse Taper Shank

Including shank, full set of collets, wrench and case.
(ER16, ER20 no Wrench)

1. ER16,20,25 Packed in Wooden Box(W)
2. ER32,40,50, Packed in Plastic Box(P)

Caution:

Please notify the taper size, collete type, set range, and set numbers when ordering.

ORDER NO.	TAPER	COLLET TYPE	SET RANGE	SET PCS	WEIGHT KGS.	CODE NO.
V-412	MT2	ER16	1-10	10	1.05	3023-401
V-413		ER16	3-10	8	1	3023-402
V-414		ER20	2-13	12	1.3	3023-403
V-415		ER20	4-13	10	1.2	3023-404
V-416		ER25	2-16	15	2.4	3023-405
V-418		ER25	4-16	7	1.3	3023-407
V-419	MT3	ER16	1-10	10	1.5	3024-401
NEW V-420		ER16	3-10	8	1.1	3024-402
V-441		ER20	2-13	12	1.35	3023-408
V-442		ER20	4-13	10	1.3	3023-409
V-443		ER25	2-16	15	2.5	3023-410
V-444		ER25	4-16	7	2.1	3023-411
V-421		ER32	3-20	18	4.1	3024-403
V-422		ER32	4-20	11	3	3024-404
V-423		ER32	6-20	6	2.7	3024-405
V-424		ER40	4-26	23	7.2	3024-406
V-425		ER40	4-26	15	6	3024-407
V-426		ER40	6-25	7	4.5	3024-408
V-427	MT4	ER32	3-20	18	4.3	3025-401
V-428		ER32	4-20	11	3.2	3025-402
V-429		ER32	6-20	6	2.9	3025-403
V-430		ER40	4-26	23	7.3	3025-404
V-431		ER40	4-26	15	6.1	3025-405
V-432		ER40	6-25	7	4.6	3025-406
V-433	MT5	ER50	12-34	12	9	3025-407
V-434		ER40	4-26	23	8.2	3026-401
V-435		ER40	4-26	15	6.9	3026-402
V-436		ER40	6-25	7	5.4	3026-403
V-437		ER50	12-34	12	9.5	3026-404