



Rods Precision Cutting-Off And End Surface Grinding Unit



| ORDER NO. | CODE NO. | N.W. | G.W. |
|-----------|----------|------|------|
| VEC-300G | 1024-010 | 89 | 112 |
| VEC-500G | 1024-011 | 92 | 115 |
| VEC-600G | 1024-012 | 95 | 118 |



For Clamping




For Cutting & Grinding

Features

- During operation, the grinding sander may be micro adjusted and repaired without changing its dimensions.
- The tightness of belt may be automatically adjusted and controlled (the larger the resistance, the tighter the belt.)
- The dimensions precision of cutting off the length of working piece are not subject to the effect of the difference of thickness of cutting-off sander piece.
- The rapid chuck is used to hold the working piece in place, opening or closing it is very quick, and $\varnothing 1-25\text{mm}$ is the same.
- When operation, a shaft with two tapered ends is used for transmission and characterized by high stability low wearing rate and long life.
- The rapid positioning rule is in the unit of 20mm and provided with a micro rule (0mm to 25mm) of which the zeroing point is the dimensions at the rapid positioning point.
- The minimum of cutting length is 60mm

SPECIFICATION

| | |
|-------------------------|---|
| Cut-off precision | 25mm \varnothing x 300mm \pm 0.01 |
| Right-angle precision | 25mm \varnothing x 90° \pm 0.01 |
| Cut-off sander lamina | 1mm t x 180mm \varnothing (Hole) 31.8mm \varnothing |
| Grinding sander surface | 27A/PA46IJ x100 x 50 x 20 |
| R.P.M. | 3600 |
| Motor | 1HP 110/220V 1 or 3 phase |
| Capacity | VEC-300G 300mm VEC-500G 500mm VEC-600G 600mm |
| Machine Size | VEC-300G/500G 600 X 550 X 660 mm VEC-600G 600 X 550 X 720 mm |

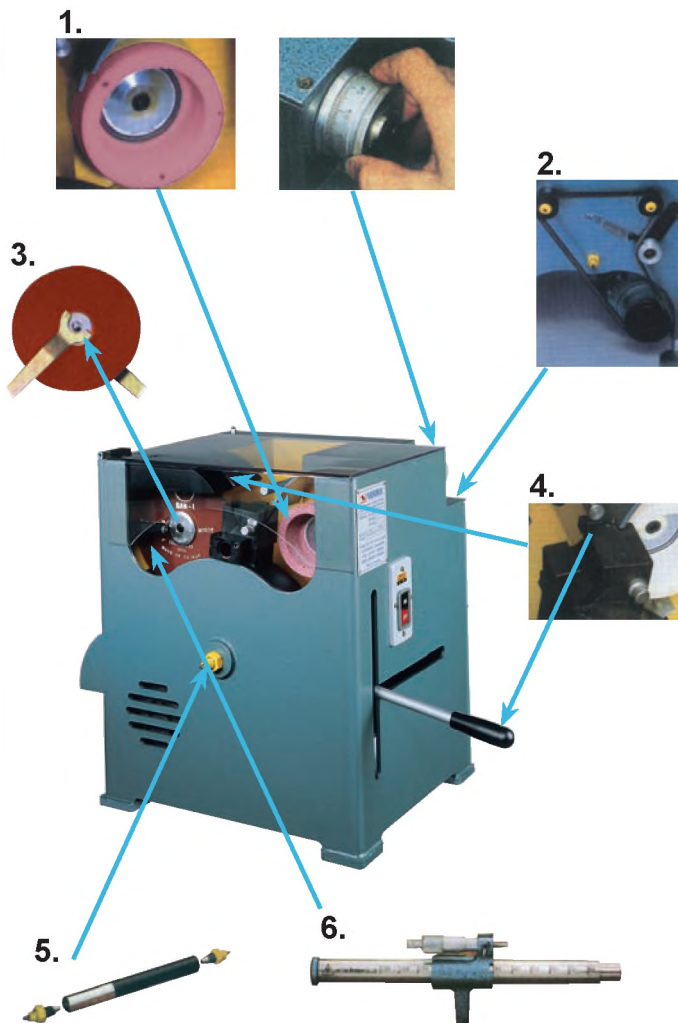

The measure rule

- The length of measure: 300mm is for VEC-300G
500mm is for VEC-500G
600mm is for VEC-600G
Except the measure rule length is different, all items of body are same.
- Please notify the voltage & phase, when you ordering