


Angle Plate



90° V-way. High carbon steel hardened to 50°-54° HRC, precision ground to within 0.005mm accuracy in squareness. Angle tolerance 30 seconds. Sets any angle 0-60°, vernier reading 10 minutes. 2 set screws provided for firmlocking at fixed angle.

Material: SK2
 Hardness: HRC50°-54°
 Squareness: ±0.005mm
 Tolerance of angle: ±10"
 Angular measures from 0°-60°

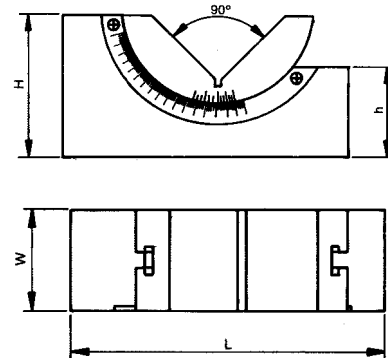


IT CAN BE LOCKED AT DESIRED ANGLE FROM THE BOTTOM.

1. USING ON THE MILLING MACHINE.
2. USING ON THE GRINDING MACHINE.
3. TO MARK OUT ON A WORKPIECE.
4. USING ON THE DRILLING MACHINE.
5. TO PROCESS WITH AN END MILL.

Unit:mm

ORDER NO.	H	W	L	h	N.W. (KGS)	CODE NO.
VAP-1	47	46	102	28	1.4	2005-001
VAP-2	47	30	102	28	0.9	2005-002
VAP-2	32	25	75	22	0.5	2005-003

Micro-Adjustable Angle Plate





ANGULAR CAN BE ADJUSTED FROM 0°~60° BY SCREW

Unit:mm

ORDER NO.	H	W	L	h	N.W. (KGS)	CODE NO.
VAPM-1	47	46	102	28	1.4	2005-010
VAPM-2	47	30	102	28	1	2005-011
VAPM-2	32	25	75	22	0.5	2005-012

Precision V Block

PAIRS GROUNDED

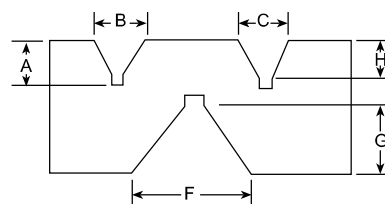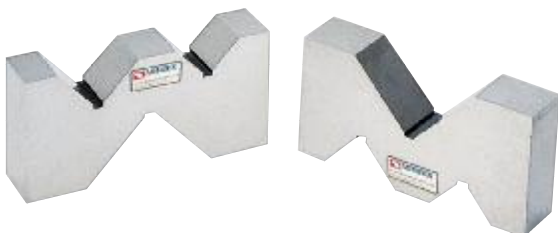

Unit:mm

ORDER NO.	A	B	C	F	G	H	L X W X H	WEIGHT(KGS)	CODE NO.
V-3VA	9	23	19	44	21	7	76X23X43	0.9	2005-015
V-4VA	14	34	28	62	27	11	100X32X60	2.1	2005-016
V-5VA	14	35	40	63	29	19	124X35X61	2.8	2005-017